

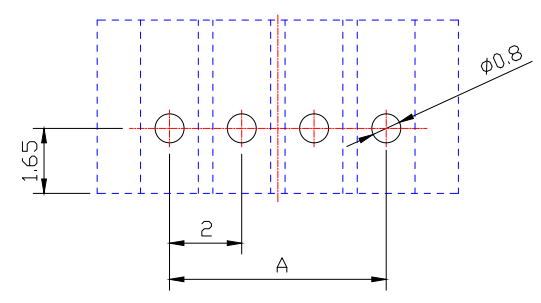


3D View

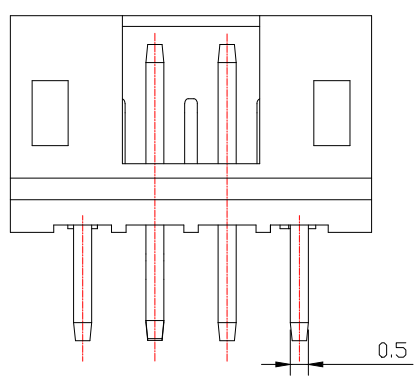

P.C.B LAYOUT

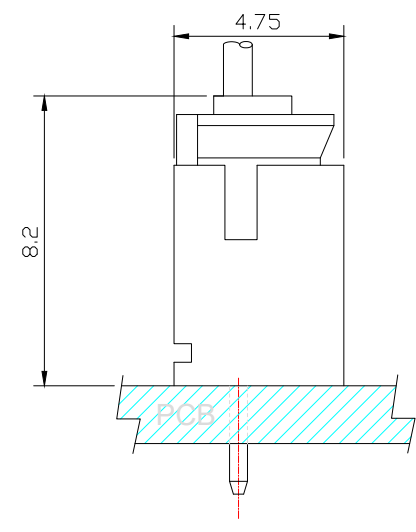

ASSEMBLY LAYOUT

34.0	30.0	16
...
22.0	18.0	10
20.0	16.0	9
18.0	14.0	8
16.0	12.0	7
14.0	10.0	6
12.0	8.0	5
10.0	6.0	4
8.0	4.0	3
6.0	2.0	2
B	A	PIN

Specifications:

Rated Current	2A AC,DC (AWG #24)				角度	$\pm 3^\circ$	设计	日期	
Rated Voltage	250V AC,DC				$63 < L$	$\pm 0.3^\circ$	审核	日期	
Contact Resistance	10M Ω max				$16 < L \leq 63$	$\pm 0.2^\circ$	核准	日期	
Insulation Resistance	1000M Ω min				$4 < L \leq 16$	$\pm 0.1^\circ$	比例	1:1	视图
Withstanding Voltage	800V AC/minute	插针	H65	镀锡	$1 < L \leq 4$	$\pm 0.05^\circ$	单位	MM	页码 1/1
Temperature Range	-25 C to +85 C	基座	PA66	白色	$L \leq 1$	$\pm 0.05^\circ$	编号		
Applicable wire Range	AWG #30 to #24	部件	材质	颜色	未详细说明之公差		版本	BY/A2020	

温州柏雨电子有限公司	
名称	PH 立式针座
型号	PH-A