


I. Specification (mm)

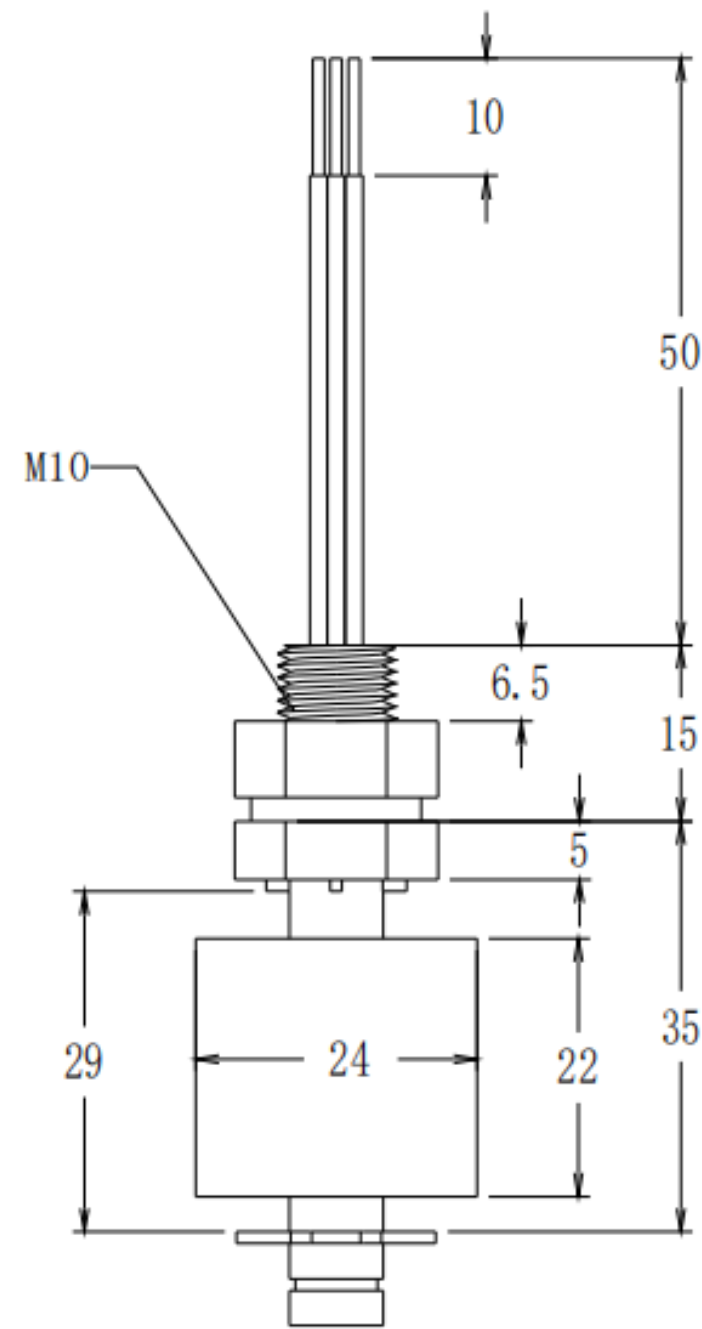

Model:SEN-PPI35(High Alarm)


1.Reed type proximity sensor

2. Material: PP


3.Installation: vertical

III. Connection Diagram

1. Two black wires : High /Low Alarm

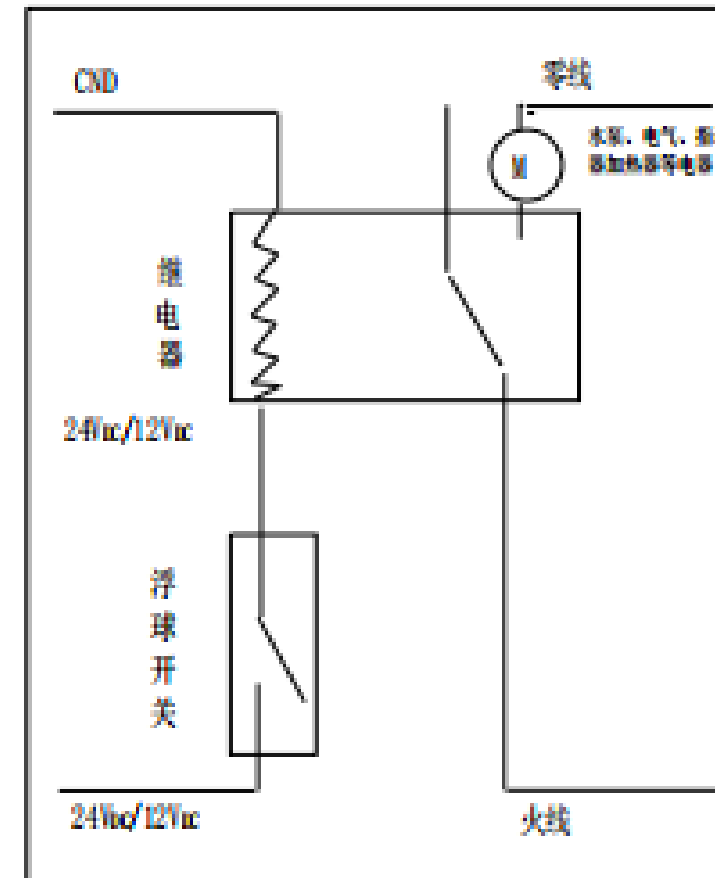

Normally Open

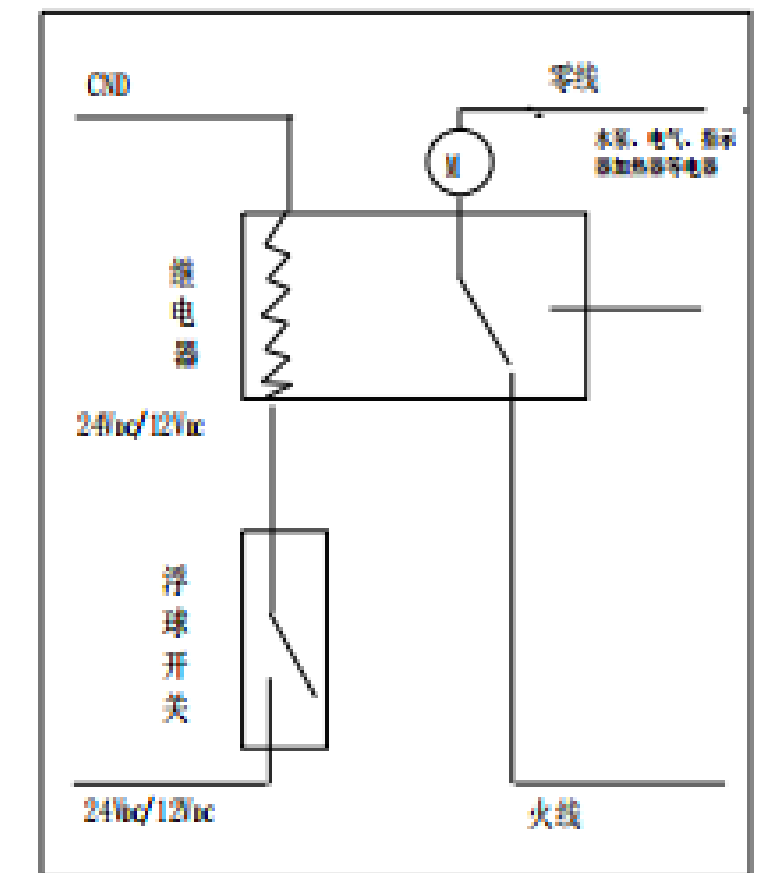

Normally Close

II. Technical parameters:

Liquid Medium	Water normal temp. $\leq 80^{\circ}\text{C}$
Working voltage	DC110V(10w)
Max current	0.5A
Installation method	Vertically installed, the float ball between buckle and screw, On to Off will output switching signal
Insulation resistance	$>100 \text{ M}\Omega$
Contact resistance	Max. 0.2Ω
Output signal	Switch signal, contact signal
Working life	Electrical life: 300,000 times, mechanical life: 10 million times

IV. Instruction:

- When a magnetic material or a material which generates magnetic is close to the switch, the characteristic may change.
 - For the installation of the water level sensor, please refer to the installation manual of the relevant model. If you have any questions, please consult our technical in time.
 - The level sensor is a precision electronic product, please prevent it from being dropped and squeezed from a high place, so as not to damage the built-in sensor
 - Do not open the float level switch to prevent damage, where unauthorized dismantling of the switches are not in the scope of the warranty.
 - Not used the structure of the switch for direct replacement may have discomfort, please discuss with engineer
 - Customer service Tel: 0757-22905969 ; Fax no.0757-22905969.
- <https://www.chnsensor.com> ; E-mail: sales4@chnsensor.com
- Remark: Applied to water dispenser, water control machine, water tank etc.