


Transmitter Module:



Status LED is always on indicating the transmitter and receiver are communicating with each other.

Receiver Module:

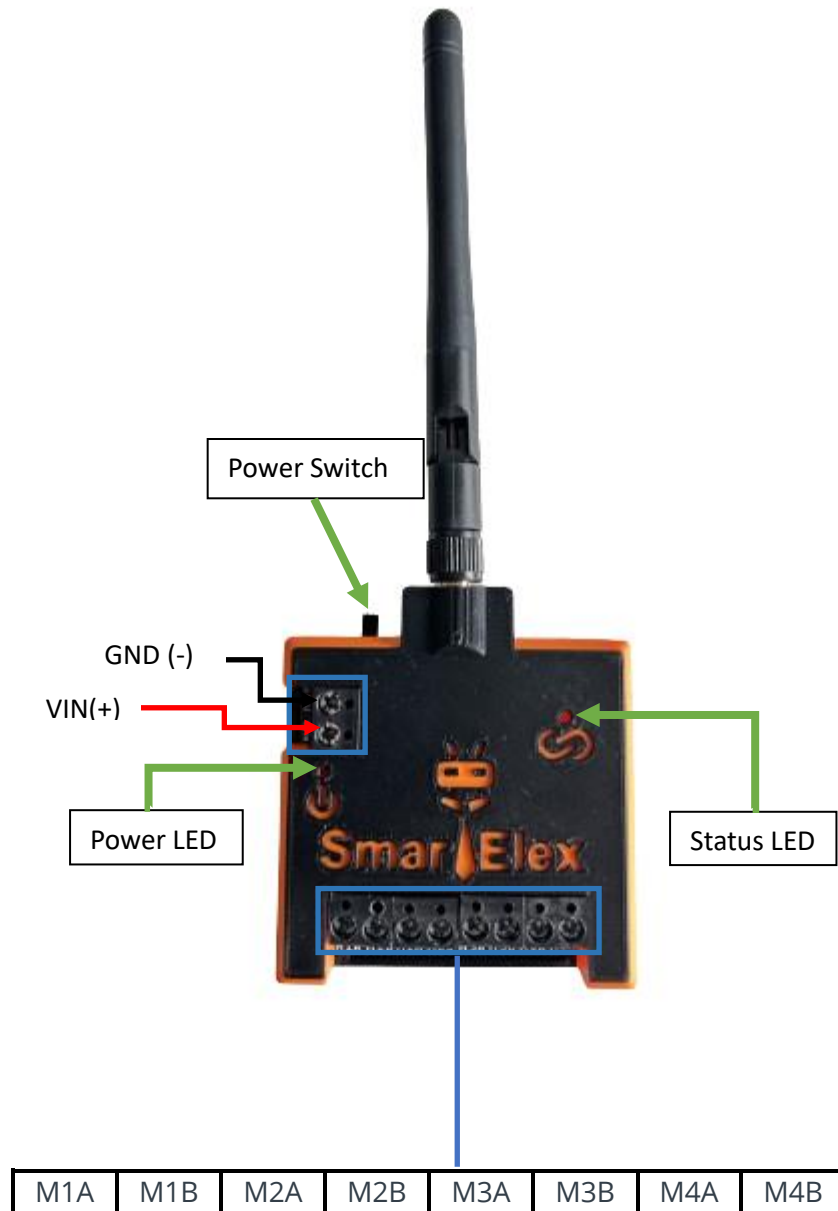

Operating voltage: 5 V to 12 V.

Output current: 1.2 A continuous (2 A peak) per motor

Receiver output based on the button press.

Button	M1A	M1B
B1	1	0
B2	0	1

Button	M2A	M2B
B3	0	1
B4	1	0

Button	M3A	M3B
B5	1	0
B6	0	1

Button	M4A	M4B
B7	0	1
B8	1	0