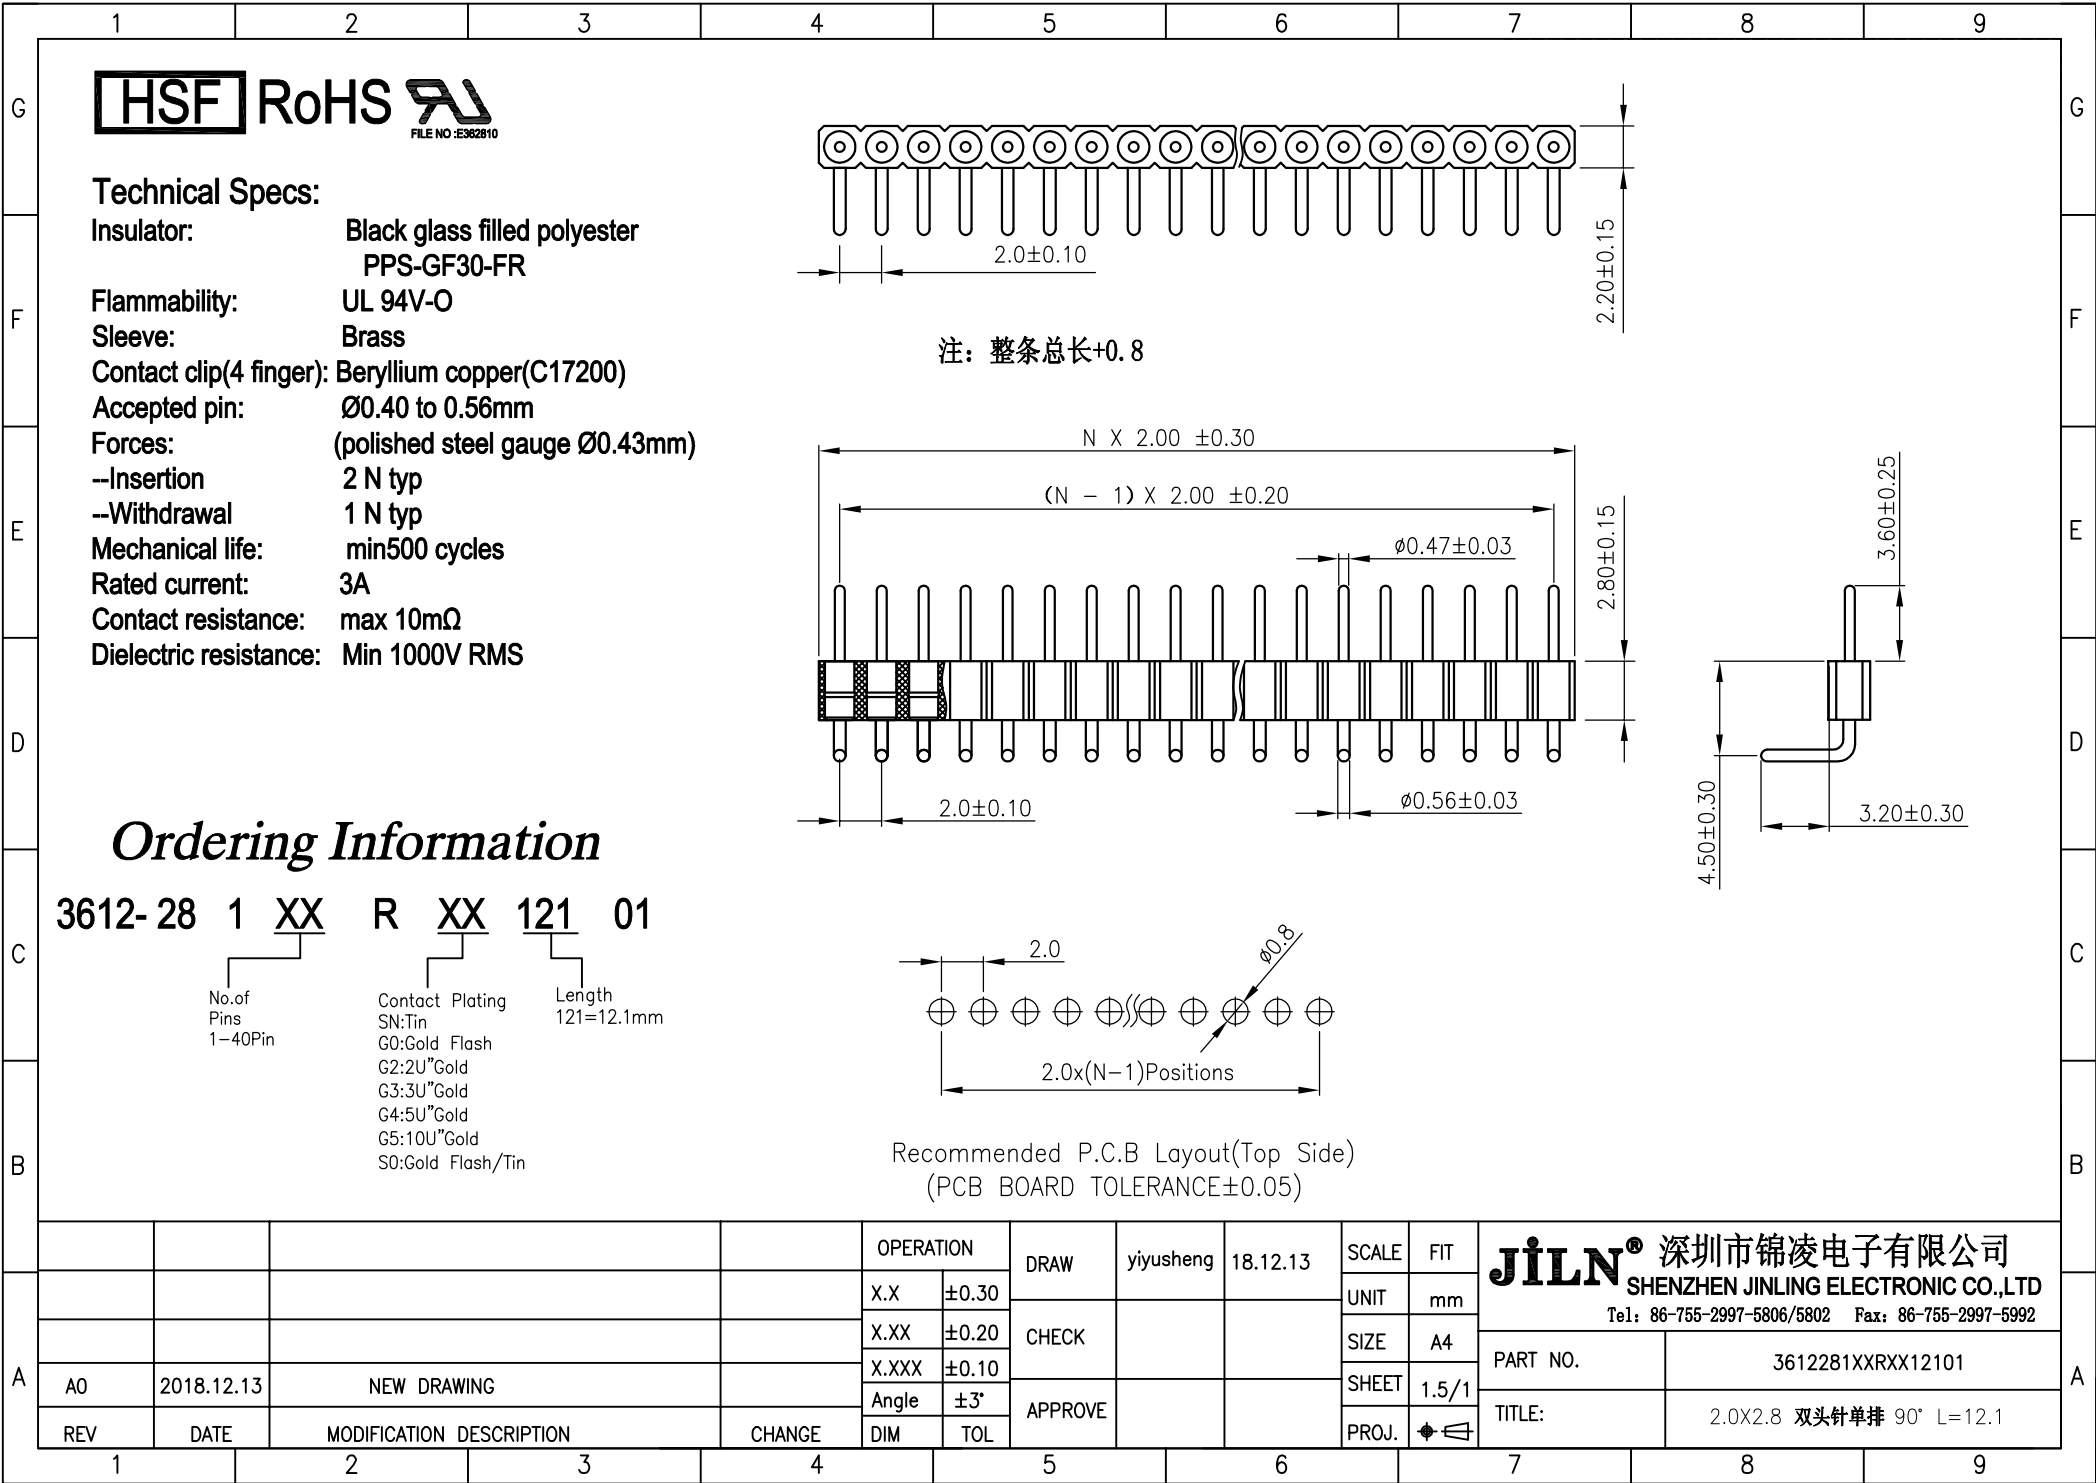


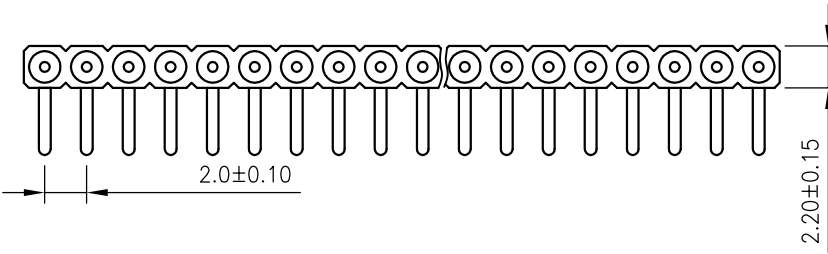
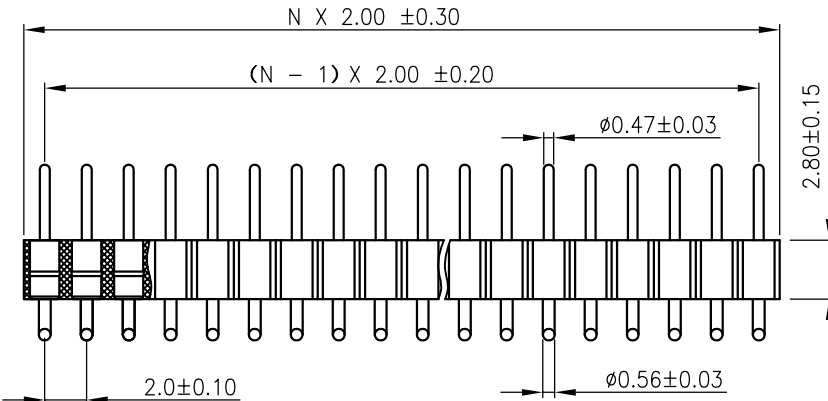
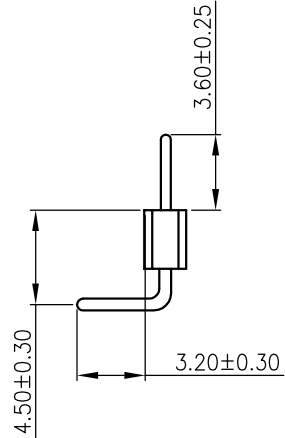
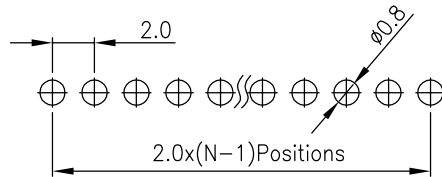


	1	2	3	4	5	6	7	8	9																																																																			
G	HSP RoHS FILE NO.:E302810																																																																											
F	Technical Specs: Insulator:Black glass filled polyester PPS-GF30-FR Flammability:UL 94V-O Sleeve:Brass Contact clip(4 finger):Beryllium copper(C17200) Accepted pin:Ø0.40 to 0.56mm Forces:(polished steel gauge Ø0.43mm) --Insertion2 N typ --Withdrawal1 N typ Mechanical life:min500 cycles Rated current:3A Contact resistance:max 10mΩ Dielectric resistance:Min 1000V RMS				注：整条总长+0.8 																																																																							
E																																																																												
D																																																																												
C	Ordering Information 3612- 28 1 XX R XX 121 01 No.of Pins : 1~40Pin Contact Plating SN:Tin G0:Gold Flash G2:2U''Gold G3:3U''Gold G4:5U''Gold G5:10U''Gold S0:Gold Flash/Tin Length 121=12.1mm				Recommended P.C.B Layout(Top Side) (PCB BOARD TOLERANCE±0.05)																																																																							
B																																																																												
A	<table border="1"><tr><td></td><td></td><td></td><td></td><td colspan="2">OPERATION</td><td rowspan="2">DRAW</td><td rowspan="2">yiyusheng</td><td rowspan="2">18.12.13</td><td>SCALE</td><td>FIT</td><td colspan="2" rowspan="4"> JILN® 深圳市锦凌电子有限公司 SHENZHEN JINLING ELECTRONIC CO.,LTD Tel: 86-755-2997-5806/5802 Fax: 86-755-2997-5992 </td></tr><tr><td></td><td></td><td></td><td></td><td>X.X</td><td>±0.30</td><td>UNIT</td><td>mm</td></tr><tr><td></td><td></td><td></td><td></td><td>X.XX</td><td>±0.20</td><td>CHECK</td><td></td><td>SIZE</td><td>A4</td></tr><tr><td>AO</td><td>2018.12.13</td><td colspan="2">NEW DRAWING</td><td></td><td>X.XXX</td><td>±0.10</td><td></td><td>SHEET</td><td>1.5/1</td></tr><tr><td>REV</td><td>DATE</td><td colspan="2">MODIFICATION DESCRIPTION</td><td>CHANGE</td><td>Angle</td><td>±3°</td><td>APPROVE</td><td></td><td>PROJ.</td><td>◆≡</td><td>TITLE:</td><td>PART NO. 3612281XXRXX12101</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td>DIM</td><td>TOL</td><td></td><td></td><td></td><td></td><td></td><td>L=12.1</td></tr></table>								OPERATION		DRAW	yiyusheng	18.12.13	SCALE	FIT	JILN® 深圳市锦凌电子有限公司 SHENZHEN JINLING ELECTRONIC CO.,LTD Tel: 86-755-2997-5806/5802 Fax: 86-755-2997-5992						X.X	±0.30	UNIT	mm					X.XX	±0.20	CHECK		SIZE	A4	AO	2018.12.13	NEW DRAWING			X.XXX	±0.10		SHEET	1.5/1	REV	DATE	MODIFICATION DESCRIPTION		CHANGE	Angle	±3°	APPROVE		PROJ.	◆≡	TITLE:	PART NO. 3612281XXRXX12101						DIM	TOL						L=12.1					
				OPERATION		DRAW	yiyusheng	18.12.13	SCALE	FIT				JILN® 深圳市锦凌电子有限公司 SHENZHEN JINLING ELECTRONIC CO.,LTD Tel: 86-755-2997-5806/5802 Fax: 86-755-2997-5992																																																														
				X.X	±0.30				UNIT	mm																																																																		
				X.XX	±0.20	CHECK		SIZE	A4																																																																			
AO	2018.12.13	NEW DRAWING			X.XXX	±0.10		SHEET	1.5/1																																																																			
REV	DATE	MODIFICATION DESCRIPTION		CHANGE	Angle	±3°	APPROVE		PROJ.	◆≡	TITLE:	PART NO. 3612281XXRXX12101																																																																
					DIM	TOL						L=12.1																																																																
	1	2	3	4	5	6	7	8	9																																																																			

1	2	3	4	5	6	7	8	9					
HSF RoHS FILE NO.:E362810 Technical Specs: Insulator: Black glass filled polyester PPS-GF30-FR Flammability: UL 94V-O Sleeve: Brass Contact clip(4 finger): Beryllium copper(C17200) Accepted pin: Ø0.40 to 0.56mm Forces: (polished steel gauge Ø0.43mm) --Insertion 2 N typ --Withdrawal 1 N typ Mechanical life: min500 cycles Rated current: 3A Contact resistance: max 10mΩ Dielectric resistance: Min 1000V RMS				注: 整条总长+0.8									
Ordering Information 3612- 28 1 XX R XX 121 01 No.of Pins 1-40Pin Contact Plating SN:Tin G0:Gold Flash G2:2U"Gold G3:3U"Gold G4:5U"Gold G5:10U"Gold S0:Gold Flash/Tin Length 121=12.1mm				Recommended P.C.B Layout(Top Side) (PCB BOARD TOLERANCE±0.05)									
				OPERATION		DRAW	yiyusheng	18.12.13	SCALE	FIT	JILN® 深圳市锦凌电子有限公司 SHENZHEN JINLING ELECTRONIC CO.,LTD Tel: 86-755-2997-5806/5802 Fax: 86-755-2997-5992		
				X.X	±0.30				UNIT	mm			
				X.XX	±0.20	CHECK		SIZE	A4				
				X.XXX	±0.10	APPROVE		SHEET	1.5/1				
REV	DATE	MODIFICATION DESCRIPTION		CHANGE	DIM	TOL			PROJ.		TITLE:	PART NO.	3612281XXRXX12101
1		2		3	4	5	6	7	8				

[illegible]

	1	2	3	4	5	6	7	8	9			
G	HSF RoHS FILE NO.:E362810									G		
F	Technical Specs:									F		
	Insulator: Black glass filled polyester PPS-GF30-FR											
	Flammability: UL 94V-O											
	Sleeve: Brass											
	Contact clip(4 finger): Beryllium copper(C17200)											
	Accepted pin: Ø0.40 to 0.56mm											
E	Forces: (polished steel gauge Ø0.43mm)									E		
	--Insertion 2 N typ											
	--Withdrawal 1 N typ											
	Mechanical life: min500 cycles											
	Rated current: 3A											
	Contact resistance: max 10mΩ											
D	Dielectric resistance: Min 1000V RMS									D		
C	Ordering Information									C		
	3612- 28 1 XX R XX 121 01											
B	No.of Pins 1~40Pin Contact Plating SN:Tin G0:Gold Flash G2:2U"Gold G3:3U"Gold G4:5U"Gold G5:10U"Gold S0:Gold Flash/Tin Length 121=12.1mm									B		
A										A		
				OPERATION		DRAW	yiyusheng	18.12.13	SCALE	FIT	JILN® 深圳市锦凌电子有限公司 SHENZHEN JINLING ELECTRONIC CO.,LTD Tel: 86-755-2997-5806/5802 Fax: 86-755-2997-5992 PART NO. 3612281XXRXX12101 TITLE: 2.0X2.8 双头针单排 90° L=12.1	
				X.X	±0.30	CHECK			UNIT	mm		
				X.XX	±0.20				SIZE	A4		
				X.XXX	±0.10				SHEET	1.5/1		
REV DATE MODIFICATION DESCRIPTION CHANGE				Angle ±3°	APPROVE			PROJ.				
				DIM TOL								
1 2 3 4 5 6 7 8 9												

1	2	3	4	5	6	7	8	9																																																															
HSF RoHS FILE NO.:E362810 Technical Specs: Insulator: Black glass filled polyester PPS-GF30-FR Flammability: UL 94V-O Sleeve: Brass Contact clip(4 finger): Beryllium copper(C17200) Accepted pin: Ø0.40 to 0.56mm Forces: (polished steel gauge Ø0.43mm) --Insertion 2 N typ --Withdrawal 1 N typ Mechanical life: min500 cycles Rated current: 3A Contact resistance: max 10mΩ Dielectric resistance: Min 1000V RMS				  																																																																			
Ordering Information 3612- 28 1 XX R XX 121 01 No.of Pins 1-40Pin Contact Plating SN:Tin G0:Gold Flash G2:2U"Gold G3:3U"Gold G4:5U"Gold G5:10U"Gold S0:Gold Flash/Tin Length 121=12.1mm				 Recommended P.C.B Layout(Top Side) (PCB BOARD TOLERANCE±0.05)																																																																			
<table><tr><td></td><td></td><td></td><td></td><td colspan="2">OPERATION</td><td rowspan="2">DRAW</td><td rowspan="2">yiyusheng</td><td rowspan="2">18.12.13</td><td>SCALE</td><td>FIT</td><td colspan="2" rowspan="5"> JILN® 深圳市锦凌电子有限公司 SHENZHEN JINLING ELECTRONIC CO.,LTD Tel: 86-755-2997-5806/5802 Fax: 86-755-2997-5992 </td></tr><tr><td></td><td></td><td></td><td></td><td>X.X</td><td>±0.30</td><td>UNIT</td><td>mm</td></tr><tr><td></td><td></td><td></td><td></td><td>X.XX</td><td>±0.20</td><td>CHECK</td><td></td><td>SIZE</td><td>A4</td></tr><tr><td>A0</td><td>2018.12.13</td><td colspan="2">NEW DRAWING</td><td>X.XXX</td><td>±0.10</td><td></td><td></td><td>SHEET</td><td>1.5/1</td></tr><tr><td>REV</td><td>DATE</td><td colspan="2">MODIFICATION DESCRIPTION</td><td>CHANGE</td><td>ANGLE</td><td>TOL</td><td>APPROVE</td><td>PROJ.</td><td></td><td>TITLE:</td><td colspan="2">2.0X2.8 双头针单排 90° L=12.1</td></tr></table>								OPERATION		DRAW	yiyusheng	18.12.13	SCALE	FIT	JILN® 深圳市锦凌电子有限公司 SHENZHEN JINLING ELECTRONIC CO.,LTD Tel: 86-755-2997-5806/5802 Fax: 86-755-2997-5992						X.X	±0.30	UNIT	mm					X.XX	±0.20	CHECK		SIZE	A4	A0	2018.12.13	NEW DRAWING		X.XXX	±0.10			SHEET	1.5/1	REV	DATE	MODIFICATION DESCRIPTION		CHANGE	ANGLE	TOL	APPROVE	PROJ.		TITLE:	2.0X2.8 双头针单排 90° L=12.1		<table><tr><td>1</td><td>2</td><td>3</td><td>4</td><td>5</td><td>6</td><td>7</td><td>8</td><td>9</td></tr></table>					1	2	3	4	5	6	7	8	9
				OPERATION		DRAW	yiyusheng	18.12.13	SCALE				FIT	JILN® 深圳市锦凌电子有限公司 SHENZHEN JINLING ELECTRONIC CO.,LTD Tel: 86-755-2997-5806/5802 Fax: 86-755-2997-5992																																																									
				X.X	±0.30				UNIT	mm																																																													
				X.XX	±0.20	CHECK		SIZE	A4																																																														
A0	2018.12.13	NEW DRAWING		X.XXX	±0.10			SHEET	1.5/1																																																														
REV	DATE	MODIFICATION DESCRIPTION		CHANGE	ANGLE	TOL	APPROVE	PROJ.		TITLE:	2.0X2.8 双头针单排 90° L=12.1																																																												
1	2	3	4	5	6	7	8	9																																																															

1	2	3	4	5	6	7	8	9
HSF RoHS FILE NO.:E362810								
Technical Specs:								
Insulator:		Black glass filled polyester						
		PPS-GF30-FR						
Flammability:		UL 94V-O						
Sleeve:		Brass						
Contact clip(4 finger):		Beryllium copper(C17200)						
Accepted pin:		Ø0.40 to 0.56mm						
Forces:		(polished steel gauge Ø0.43mm)						
--Insertion		2 N typ						
--Withdrawal		1 N typ						
Mechanical life:		min500 cycles						
Rated current:		3A						
Contact resistance:		max 10mΩ						
Dielectric resistance:		Min 1000V RMS						
Ordering Information								
3612- 28 1 XX R XX 121 01								
No.of Pins 1~40Pin		Contact Plating SN:Tin G0:Gold Flash G2:2U"Gold G3:3U"Gold G4:5U"Gold G5:10U"Gold S0:Gold Flash/Tin		Length 121=12.1mm				
				2.0 2.0x(N-1)Positions Ø0.8				
				Recommended P.C.B Layout(Top Side) (PCB BOARD TOLERANCE±0.05)				