



# HYBRID STEPPING MOTOR SPECIFICATION

DIMENSIONS unit=mm

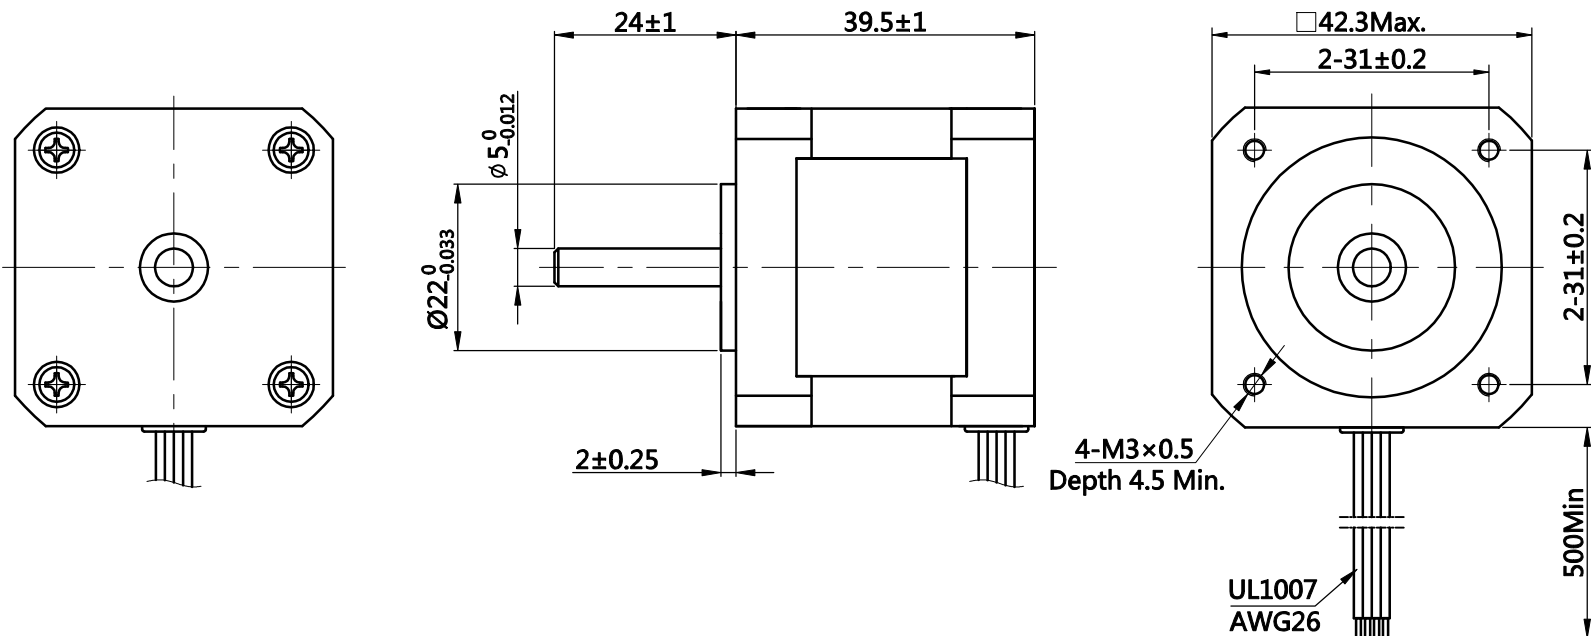

## Wiring Diagram




## Exciting Sequence vs. Direction of Rotation

STEP	A	B	C	D	
1	+	+	-	-	CCW ↑
2	-	+	+	-	
3	-	-	+	+	
4	+	-	-	+	

CW ↓

Clockwise view from mounting side



1, Number of Phase	2				
2, Step Angle	1.8° deg.				
3, Rated Voltage	2.55 V				
4, Rated Current/Phase	1.7 A ( 峰值 Peak Value )				
5, Phase Resistance	1.5 Ω±10%(20°C)				
6, Phase Inductance	2.3 mH±20%(1kHz 1V RMS)				
7, Holding Torque	4.2 kg.cm				
8, Insulation Class	B ( 130° ) ; 温升 80K Max.				
9, Weight	0.24 kg				
<b>Specifications</b>		<b>Comment</b>			

REV.	REVISION RECORD		DATE
	DESIGN	成兆茹 2020.6.29	
	STANDARD		www.jkongmotor.com
	TECHNOLOGY		
	CHECK		
	APPROVE		

TITLE	STEPPING MOTOR			
DWG.NO.	JK42HS40-1704			
MATERIAL	ECN SIGN	* SIZE	A4	
REV.	A	SCALE	1:2	SHEET 1 of 1

Specification